


RUBBER ADJUSTMENT RING

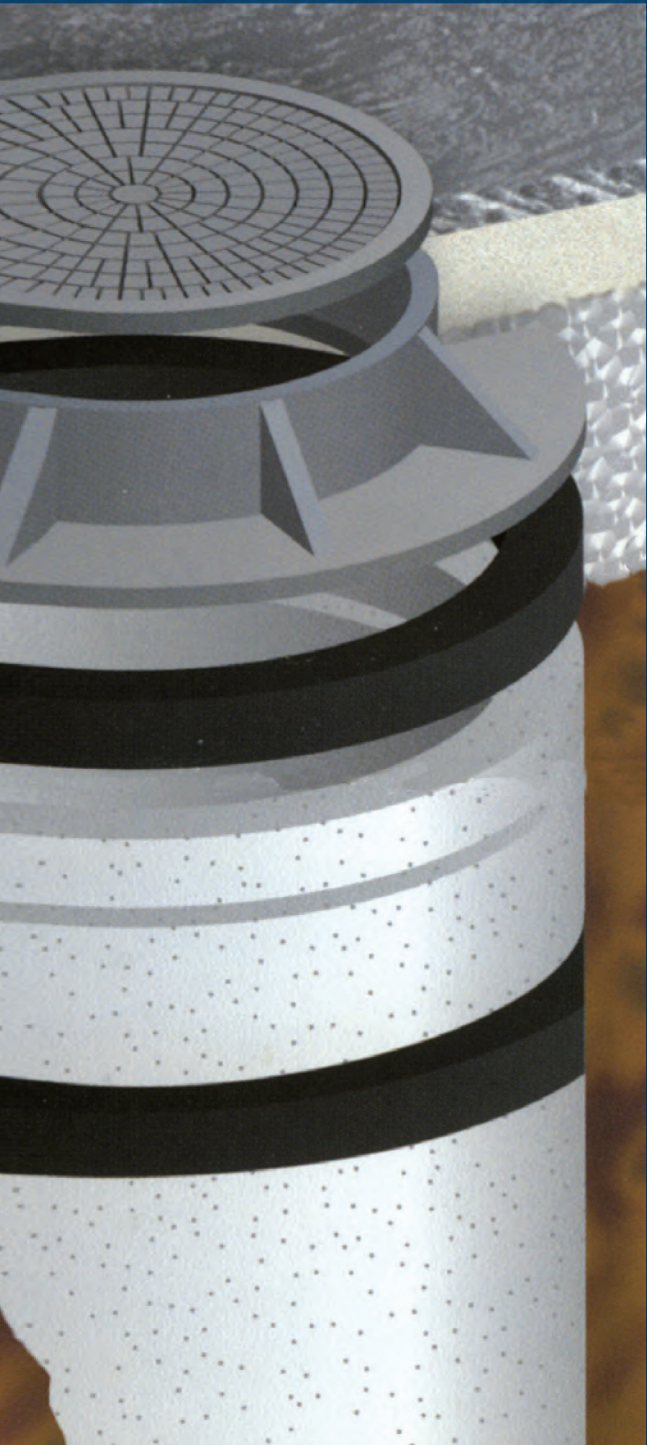

**HIGHWAY RUBBER
& SAFETY INC.**

**SOLUTION FOR MANHOLE
STRUCTURE DAMAGE PROBLEMS**

**REDUCE SUBSTRUCTURE
BUDGET MAINTENANCE**

ELIMINATE VIBRATION

ELIMINATE NOISE

WATERTIGHT

QUICK & EASY INSTALLATION

**EXTEND LIFETIME OF
INFRASTRUCTURES**

20 YEAR WARRANTY

MADE OF 100% RECYCLED RUBBER



FLEX[®] O RING

FLEXO RINGTM

CHARACTERISTICS

- Made from 100% recycled rubber
- Superior quality rubber that comes from shredded tires
- Lighter weight
- Compressed and cook in a mould into the desire size and shape
- Meet ISO-9000 quality standard
- Thickness variation between (12 mm) ½ " and (75 mm) 3 " by interval of (12 mm) ½ "
- Forms according to the frame: round, square or rectangular
- Flat or angled profile

Before



After

Structure damage



No headache

Crack or split



Quick installation & Ecological

BENEFITS

- Reduce impact on public subterranean structure.
- Reduce budget maintenance
- Allow a better load and wheel impact distribution on street catch basin
- Ecological
- Eliminate traffic vibrations and damage on subterranean structure
- Watertight
- Protect against load concentrated stress on manhole substructure.
- Allow to fit perfectly the subterranean structures in place.
- Uniformly distributed traffic loads over the entire supporting structure
- Quick installation



422 Côte Sud | Boisbriand | QC | Canada | J7E 4H4
 T | 450.979.0007
 F | 450.979.0130
www.asrcanada.ca

Canada | USA
 T Free | 1.800.361.1700
 F Free | 1.800.327.9593

Distributed by: